

Hallway

The specialist for long hallways and corridors.

Designed to match the Control PRO II family, the Hallway presence detector leaves a visibly lasting impression in modern buildings. Providing a detection zone of 25 x 3 m, it guarantees a fast switching response. Ideal for use in long hallways and corridors. Bluetooth takes the effort out of setting them up, putting them into operation and interconnecting them.



 professional line



Bluetooth for fast and energy-saving connections




Temperature measuring with the bus interfaces IP, DALI-2 IPD and KNX




Humidity measuring with the bus interfaces IP, DALI-2 IPD and KNX

High-frequency hallway & corridor presence detector

Hallway

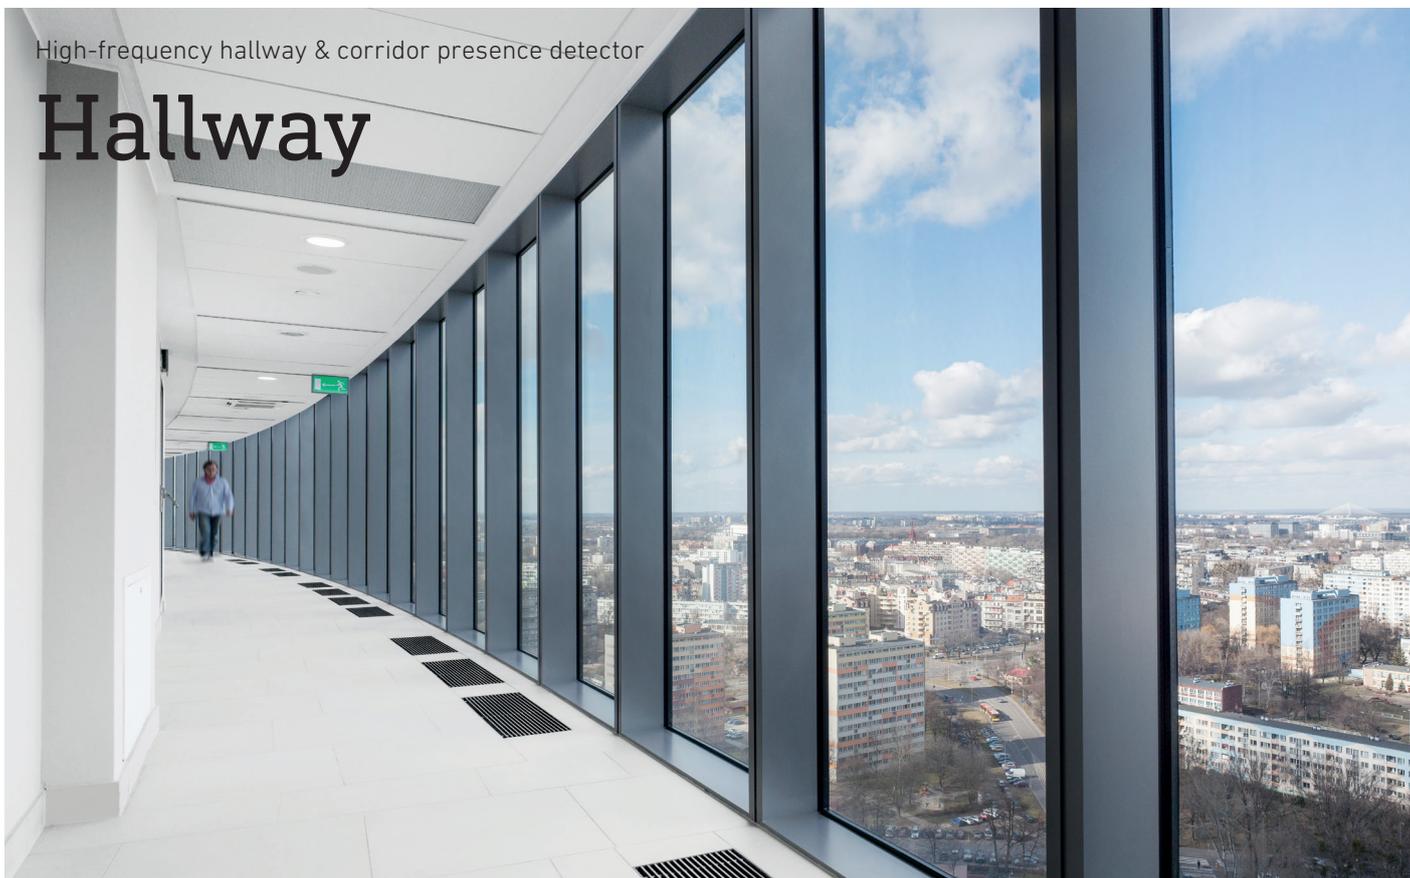

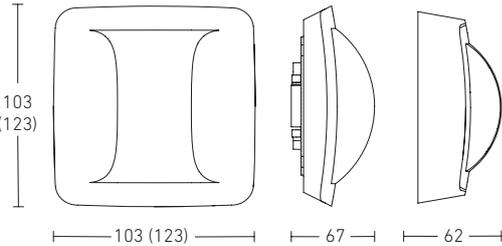 <p>360° high-frequency hallway & corridor sensor</p>	 <p>Detection zone 25 x 3 m radial, digitally adjustable per direction</p>	 <p>Mounting height 4 m max.</p>	<p>Hallway technical specifications</p> <p>Mounting height: 2.00 – 4.00 m Reach, radial & tangential..... 25 x 3 m</p> <p>Ordering details (concealed installation)</p> <p>COM1 4007841 057985 COM1 (black) 4007841 082055 COM2 4007841 058005 DALI-2 APC 4007841 058029 DALI-2 IPD..... 4007841 064532 KNX V3.1 4007841 058036 KNX V3.1 (black)..... 4007841 082079 IP 4007841 066161 BT IPD (Slave) 4007841 064556</p> <p>Ordering details (surface installation)</p> <p>COM1 4007841 057978 COM1 (black) 4007841 082048 COM2 4007841 057992 DALI-2 APC 4007841 058012 DALI-2 IPD..... 4007841 064549 KNX V3.1 4007841 064488 KNX V3.1 (black)..... 4007841 082062 IP 4007841 066154 BT IPD (Slave) 4007841 064563</p> <p>Ordering details (recessed)</p> <p>COM1 4007841 079468 KNX V3.1 4007841 079475</p> <p>Ordering details (Zubehör)</p> <p>Surface-mounting adapter 4007841 063887</p>
 <p>Settings via Smart Remote app</p>	<p>7</p> <p>Interfaces</p>		
 <p>UV protected material</p>	 <p>103 (123)</p> <p>103 (123) 67 62</p>		